




Large Drills
Perceuses Grande Capacité
Große Winkelbohrmaschinen
Taladros Grandes
Trapani Pesanti




Standard Equipment

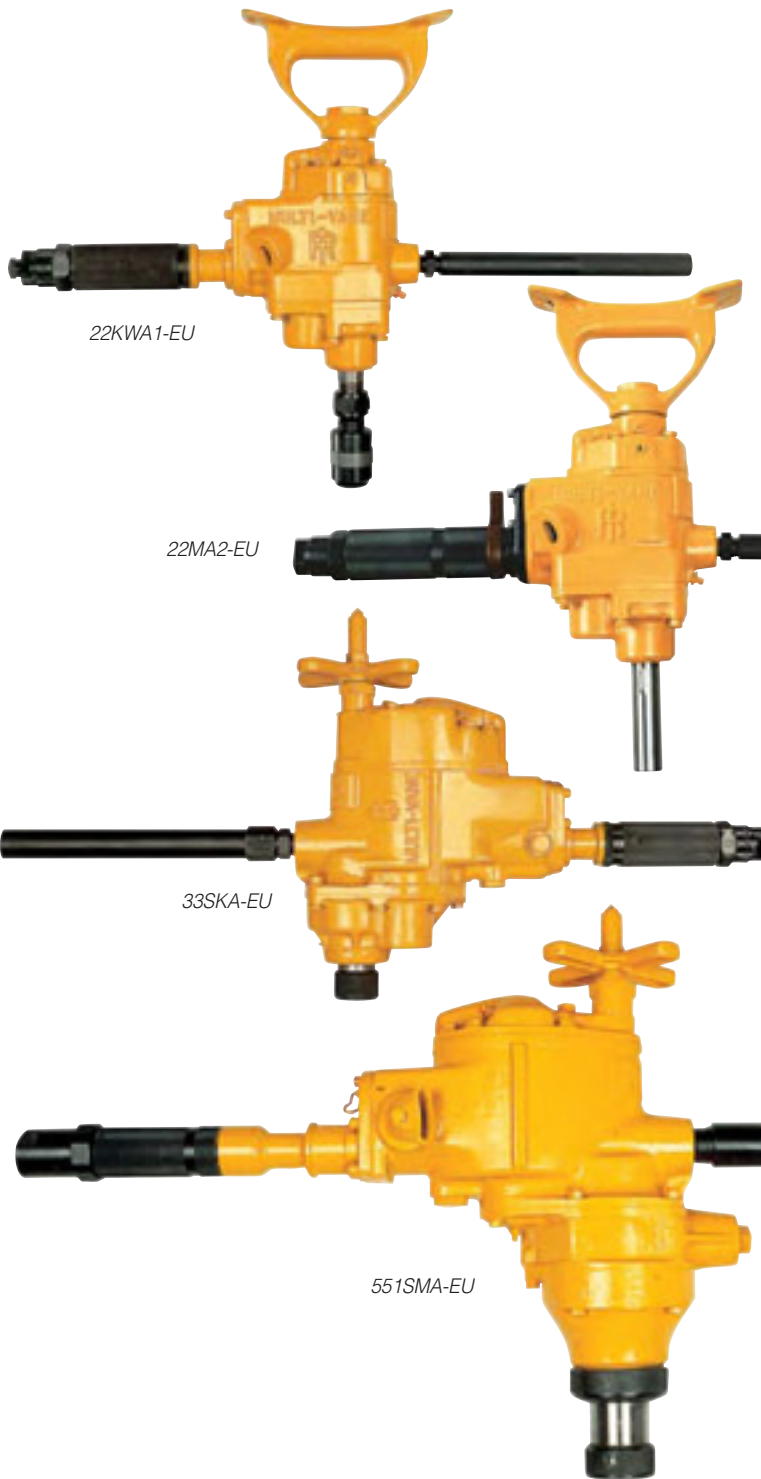

- Built-in lubricator.
- Lubricateur incorporé.
- Integrierter Öl
- Lubricador incorporado.
- Lubrificatore incorporato.

- Attachments available: chuck (A), morse taper (B) or wood bit chuck (C).
- Porte-forêts disponibles: mandrin (A), cône morse (B) ou mandrin rapide pour forêt bois (C).
- Lieferbare Einsätze: Bohrfutter (A), Morsekeonus (B), Futter für Holz-Bohrklingen (C).
- Porta-brocas disponibles: mandril (A), cono morse (B) o mandril rápido para taladro madera (C).
- Porta-punte disponibili: mandrino (A), cono a morsa (B), oppure mandrino rapido per punte da legno (C).

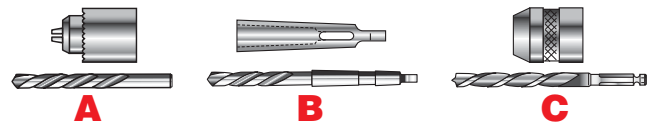

Specifications at 90 psi – Caractéristiques à 6,2 bar – Technische Daten bezogen auf 6,2 bar – Especificaciones a 6,2 bar – Caratteristiche a 6,2 bar

| Ref. | kWatt | 1min. | | | | | | H | | |
|-----------|-------|-------|-------------------|----|----|----|------|-----|----------|----|
| | kW | rpm | | mm | mm | mm | kg | mm | in (NPT) | mm |
| 22KA1-EU | 1.30 | 725 | A 0-1/2" | 14 | 11 | 11 | 7.0 | 448 | 3/8 | 13 |
| 22KWA1-EU | 1.30 | 725 | C 1/2" (1) | 14 | – | – | 6.5 | 438 | 3/8 | 13 |
| 22MA2-EU | 1.30 | 350 | B No. 2 | 22 | 16 | 16 | 6.5 | 473 | 3/8 | 13 |
| 33SKA-EU | 2.20 | 300 | B No. 3 | 32 | 25 | 28 | 11.7 | 355 | 1/2 | 19 |
| 33SMA-EU | 2.20 | 185 | B No. 3 | 32 | 32 | 41 | 14.1 | 427 | 1/2 | 19 |
| 44SMA-EU | 2.68 | 155 | B No. 4 | 51 | 51 | 51 | 19.8 | 463 | 1/2 | 19 |
| 551SMA-EU | 4.66 | 120 | B No. 5 | 76 | 64 | 64 | 31.3 | 556 | 1 | 25 |

(1) 1/2" stub taper, threaded – Broche fileté 1/2" – 1/2" konischer Gewindestutzen – Alojamiento cónico de 1/2" roscado – Perno conico filettato 1/2".