

Air Tappers
Taraudeuses pneumatiques
Druckluft-Gewindeschneidmaschinen
Roscadoras neumáticas
Filettatrici pneumatiche

**Q2 &
7 Series**




**Standard
Equipment**

Dead handle assembly on 7 Series	Poignée auxiliaire sur série 7	Hilfsgriff (für Baureihe 7)	Mango de sujeción para serie 7	Impugnatura ausiliaria per serie 7
----------------------------------	--------------------------------	-----------------------------	--------------------------------	------------------------------------

Specifications at 90 psi – Caractéristiques à 620 kPa – Technische Daten bezogen auf 620 kPa – Especificaciones a 620 kPa – Caratteristiche a 620 kPa

Series / Baureihe				
Q2	0.24 kW	75 dBa	1/4" NPT	6 mm
7	0.44 kW	79 dBa	1/4" NPT	8 mm

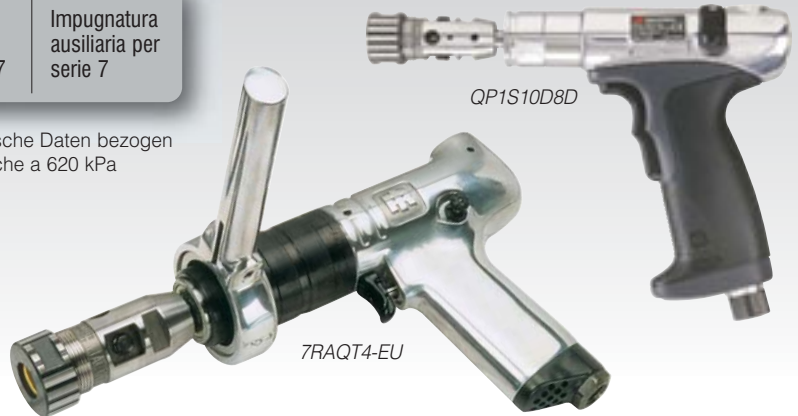

Ref.								
DC TRIGGER START — DÉM. PAR GÂCHETTE — DRÜCKERSTART — ARRANQUE POR GATILLO — AVVIAMENTO A GRILLETTO								
QP1S10D8D	1000	5.2	0.85	183	6	Conical (CM1)	15	450
QP1S05D8D	500	9.8	0.85	183	6	Conical (CM1)	15	450
7RAQT4-EU	475	27	1.50	300	13	Conical (CM1)	22	760

Air Multi-Function Drill
Perceuse multi-fonction pneumatique
Druckluft-Multi-Funktions-Bohrmaschine
Taladro neumático multi-funcional
Trapano pneumatico multi-funzioni

**MS
Series**



**Standard
Equipment**

Direct drive	Entraînement direct	Direktantrieb	Accionamiento directo	Trasmissione diretta
Horizontal hanger	Suspension horizontale	Horizontal-Aufhänger	Suspensión horizontal	Sospensione orizzontale

Specifications at 90 psi – Caractéristiques à 620 kPa – Technische Daten bezogen auf 620 kPa – Especificaciones a 620 kPa – Caratteristiche a 620 kPa

Series / Baureihe				
MS	0.33 kW	78 dBa	1/4" BSP	9 mm



Ref.								
DC TRIGGER START — DÉM. PAR GÂCHETTE — DRÜCKERSTART — ARRANQUE POR GATILLO — AVVIAMENTO A GRILLETTO								
MS2206RP5-Q4	600	11	1.00	190	8	1/4" Ⓢ	20	570

Options



Ø 0-8 mm:
Ref. **123182**
Ø 1-10 mm:
Ref. **123205**



Ø 0-6 mm:
Ref. **123203**
Ø 1-10 mm:
Ref. **123204**